


T-CORO

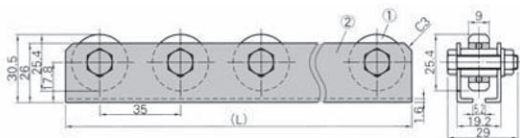


() 内的尺寸为参考值。
 辊的承重：20kg/个

① 材质 SS400 硬度 55HRC~ (渗碳淬火)
 ② 材质 SPCC

L	规格	A 辊数
(105)	T-CORO	3
(140)		4
(175)		5
(210)		6
(245)		7
(280)		8
(315)		9
(350)		10
(385)		11
(420)		12
(455)		13
(490)		14
(525)		15

L	规格	A 辊数
(560)	T-CORO	16
(595)		17
(630)		18
(665)		19
(700)		20
(735)		21
(770)		22
(805)		23
(740)		24
(875)		25
(910)		26
(945)		27
(980)		28

T-GORO

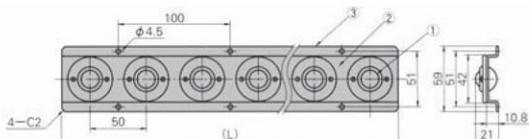

() 内的尺寸为参考值。
 辊珠的承重：8kg/个

① 材质 SUJ2
 ②③ 材质 SPCC

L	规格	A 辊数
(200)	T-GORO	4
(300)		6
(400)		8
(500)		10
(600)		12
(700)		14
(800)		16
(900)		18
(1000)		20
(1100)		22
(1200)		24



订购举例

规格	A
T-CORO - 10	
T-GORO - 8	