


D	公差	D1	p6	D2	L1	L2	L3	E	规格	D	L
25		25		21	30				T-SGP	25	80
											100
											120
											140
											160
30		30	±0.035 ±0.022	26	40	5	5	8	T-SGP	30	100
											120
											140
											160
											180
40	-0.005 -0.015	40		36	50				T-SGP	40	120
											140
											160
											180
											200
50		50	±0.042 ±0.026	45	70			10	T-SGP	50	120
											140
											160
											180
											200
60	-0.010 -0.020	60		55	90				T-SGP	60	250
											300
											350
											250
											250
65		65	±0.051 ±0.032	60	100	10	10		T-SGP	65	300
											350
											250
											350
											250
80	-0.010 -0.025	80		75	120			12	T-SGP	80	300
											350
											400
											300
											350
100		100	±0.059 ±0.037	95	150				T-SGP	100	300
											350
											400

订购举例 -
T-SGP 50 - 250

■ 导柱拉入垫片

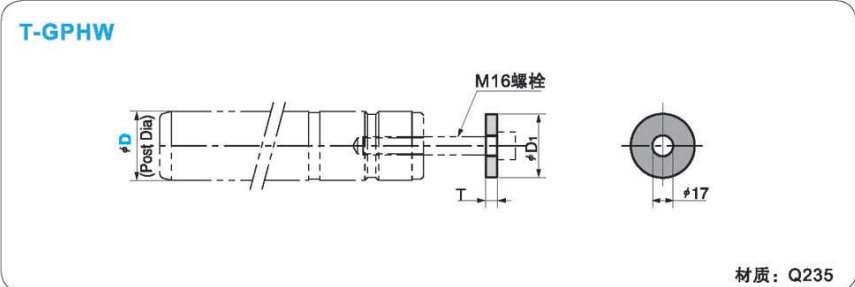

D1	T	规格	D (导柱直径)
55	10	T-GPHW	60
75			80
95	15	T-GPHW	100

订购举例
T-GPHW 80

追加加工	追加加工号	说明
MP		在固定端加工拉入垫片螺纹孔(参考配图)指定螺钉直径M
HW		包括导柱拉入垫片T-GPHW, 应用于导柱直径D=60.80和100 (M16X50孔已加工) 不提供内六角螺钉。

订购举例 - -
T-SGP 40 - 160 - MP10
T-SGP 80 - 250 - HW

• 螺钉深度(M)

D	M	M	深度
25	8·10	M8	25
30·40	10·12	M10	30
50·60·65	12·16	M12	40
80·100	16·20	M16	50
		M20	50