


■ 使用说明

- 本品通常用于厚度为10或20mm, 2个或4个安装孔的导板。
- 使用时在应用图示位置打M4螺纹孔, 以防止薄垫移位。



应用举例

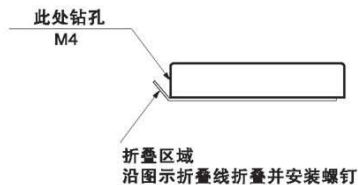

W ₁	L ₁	L ₂	w	L	规格	应用导板尺寸		厚度 T
						W	L	
	45	12.5		70			75	
	50			95			100	
	75	22.5	38	120		48	125	
	100			145			150	
	150			195			200	
	45	12.5		70			75	
	50		48	95		58	100	
	100			145			150	
	25			70			75	0.03
	50			95			100	
	75		65	120		75	125	0.05
	100			145			150	
	150			195	T-SHMS		200	0.1
	50			95			100	
	75			120			125	0.2
	100	22.5	90	145		100	150	
	150			195			200	0.3
50	200			245			250	
	75			120			125	
	100			145		125	150	
	150		115	195			200	
	200			245			250	
100	100			145			150	
	150		140	195		150	200	
	200			245			250	



订购举例

规格	W	-	L	-	T
T-SHMS	48	-	125	-	0.1



订购说明:

本产品设有最低起定量, 具体请联系营业部。