


T-SOBU

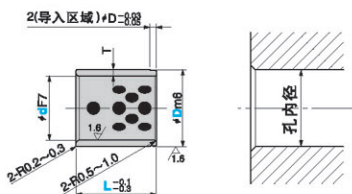

- 配合轴公差
- d8-般用 (高负荷)
- e7-般用 (轻负荷)
- f8-高精度

工作温度小于150℃

材料: 铜合金+石墨



订购举例

规格	d	-	D	-	L
T-SOBU	10	-	12	-	15

d	F7	D	m6	孔		壁厚 T	规格	d	D	L
				I.D.	H7					
6	+0.022 +0.010	8		8				6	8	8
										10
										12
										15
										15
8		10	+0.015 +0.005	10	+0.015 0	1		8	10	8
										10
										12
										15
										20
10	+0.028 +0.013	12		12				10	12	8
										10
										12
										15
										20
12		15		15				12	15	10
										12
										15
										20
										25
13		16	+0.018 +0.007	16	+0.018 0	1.5	T-SOBU	13	16	10
										12
										15
										20
										25
15	+0.034 +0.016	18		18				15	18	10
										12
										15
										20
										30
16		20	+0.021 +0.008	20	+0.021 0	2		16	20	10
										12
										15
										20
										25
18	+0.034 +0.016	22		22				18	22	10
										12
										15
										20
										25
										30