



T-SOD

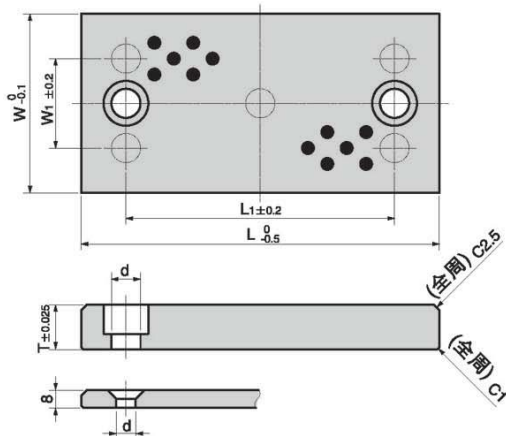

材料：铜合金和石墨

● 螺钉孔图形

每种规格螺钉孔位置不同，请指定孔的标准并参照右表。



● 滑动方向

每种规格滑动方向不同，请指定滑动方向标记并参照右表。



T	W	W ₁	L ₁	L	螺钉数量	安装螺钉	图形孔	滑动方向	规格
8	40	-	60	100	2	M8	A	S-1	T-SOD-301
			120	160	3		A	S-1	T-SOD-302
			210	250	3		C	S-1	T-SOD-303
12	30	-	60	100	2	M8	A	S-1	T-SOD-304
			120	160	2		A	S-1	T-SOD-305
			210	250	3		C	S-1	T-SOD-306
12	40	-	60	100	2	M8	A	S-1	T-SOD-307
			120	160	2		A	S-1	T-SOD-308
			210	250	3		C	S-1	T-SOD-309
12	80	40	60	100	2	M8	B	S-2	T-SOD-310
			120	160	4		E	S-2	T-SOD-311
			210	250	5		F	S-1	T-SOD-312
16	40	-	60	100	2	M10	A	S-1	T-SOD-313
			120	160	3		A	S-1	T-SOD-314
			210	250	3		C	S-1	T-SOD-315
16	60	30	60	100	2	M10	B	S-2	T-SOD-316
			120	160	2		B	S-1	T-SOD-317
			210	250	3		D	S-1	T-SOD-318
16	100	60	60	100	2	M10	B	S-2	T-SOD-319
			120	160	4		E	S-2	T-SOD-320
			210	250	6		G	S-1	T-SOD-321
20	50	20	60	100	2	M12	B	S-1	T-SOD-322
			120	160	2		B	S-1	T-SOD-323
			210	250	3		D	S-1	T-SOD-324
20	80	40	60	100	2	M12	B	S-2	T-SOD-325
			120	160	4		E	S-2	T-SOD-326
			210	250	5		F	S-1	T-SOD-327
20	125	85	60	100	2	M12	E	S-2	T-SOD-328
			120	160	4		E	S-2	T-SOD-329
			210	250	6		G	S-1	T-SOD-330



订购举例

规格
T-SOD-315